

**pure
transfer**



FKM Screen Gasket
Specification Sheet | 018

Our filtration screen gaskets program provide the most comprehensive range of stainless steel mesh and filter cloth for process applications. Each gasket easily installs in between any ASME BPE or standard tri-clamp.



Available Sizes

Part #	Gasket O.D.	Gasket I.D.	Bead
42MPVS050-XXSS	0.86"	0.38"	NA
42MPVS075-XXSS	0.86"	0.62"	NA
40MPVS100-XXSS	1.984"	0.9"	1.718"
40MPVS150-XXSS	1.984"	1.4"	1.718"
40MPVS200-XXSS	2.515"	1.9"	2.218"
40MPVS250-XXSS	3.05"	2.4"	2.781"
40MPVS300-XXSS	3.579"	2.9"	3.281"
40MPVS400-XXSS	4.682"	3.869"	4.344"
40MPVS600-XXSS	6.507"	5.817"	6.156"

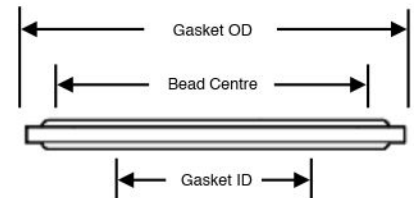

FKM Screen Gasket

Size	1/2" to 6"
Temperature Range	-34°C to 204°C
Applications	Fluid Filtration & Equipment Protection
Material	FKM Gasket 316L SS Mesh
Pack Size	Individual or Multiples
Extras	Laser Engraving



Certificate Available

