






FKM Gasket  
Specification Sheet | 012

[Click Here for Brochure](#)



FKM (Viton) is widely used in processing pipeline systems pharmaceutical and biotech industries. FKM has an excellent temperature range combined with good chemical resistance properties & great sealing characteristics. Each gasket easily installs in between any ASME BPE or standard tri-clamp.

Available Sizes			
Part #	Gasket O.D.	Gasket I.D.	Bead
42MPSFY-050	0.86"	0.38"	NA
42MPSFY-075	0.86"	0.62"	NA
40MPSFY-100	1.984"	0.9"	1.718"
40MPSFY-150	1.984"	1.4"	1.718"
40MPSFY-200	2.515"	1.9"	2.218"
40MPSFY-250	3.05"	2.4"	2.781"
40MPSFY-300	3.579"	2.9"	3.281"
40MPSFY-400	4.682"	3.869"	4.344"
40MPSFY-600	6.507"	5.817"	6.156"

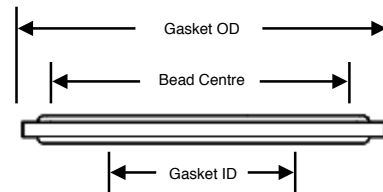

FKM Gasket	
Size	1/2" to 6"
Temperature Range	- 34°C to 204°C
Applications	Application Water Intermittent Low Temp Steam
Material	FKM
Pack Size	Individual or Multiples
Extras	Laser Engraving



Certificates Available

