





**Tuf-Steel® Gasket Type II**  
Specification Sheet | 078

[Click Here for Brochure](#)

The Tuf-Steel® gasket is ideal for extreme temperature applications, such as steam, because Tuf-Steel® does not revert, eliminating creep and cold flow, resulting in a leak free seal. Tuf-Steel® easily installs in between any ASME BPE or standard tri-clamp.



Available Sizes			
Part #	Gasket O.D.	Gasket I.D.	Bead
40MPG-TS-F-100	1.984"	0.9"	1.718"
40MPG-TS-F-150	1.984"	1.4"	1.718"
40MPG-TS-F-200	2.515"	1.9"	2.218"
40MPG-TS-F-250	3.05"	2.4"	2.781"
40MPG-TS-F-300	3.579"	2.9"	3.281"
40MPG-TS-F-400	4.682"	3.869"	4.344"

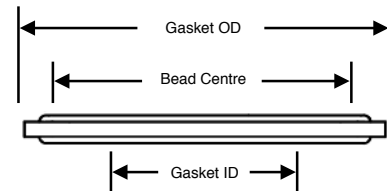

Tuf Steel® Type II	
Size	1" to 4"
Temp Range	- 73°C to 260°C
Applications	Continuous Steam, SIP, CIP
Material	Tuf Steel®
Pack Size	Individual or Multiples
Extras	Laser Engraving



Certificates Available

