



White EPDM Gasket Type II Specification Sheet | 080


[Click Here for Brochure](#)

EPDM is widely used in processing pipeline systems pharmaceutical and biotech industries. EPDM has an excellent temperature range and great sealing characteristics. Each gasket easily installs in between any ASME BPE or standard tri-clamp.



Available Sizes

Part #	Gasket O.D.	Gasket I.D.	Bead
40MPFE-W-100	1.984"	0.9"	1.718"
40MPFE-W-150	1.984"	1.4"	1.718"
40MPFE-W-200	2.515"	1.9"	2.218"
40MPFE-W-250	3.05"	2.4"	2.781"
40MPFE-W-300	3.579"	2.9"	3.281"
40MPFE-W-400	4.682"	3.869"	4.344"

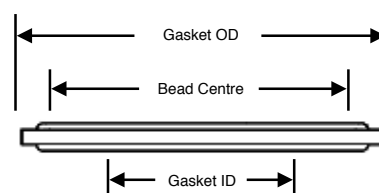

White EPDM Gasket Type II

Size	1" to 4"
Temperature Range	- 34°C to 148°C
Applications	Application Water Intermittent Low Temp Steam
Material	EPDM
Pack Size	Individual or Multiples
Extras	Laser Engraving

[Certificates Available](#)

FDA



ADI

USP
VI