





Tuf-Flex® Gasket
Specification Sheet | 053

[Click Here for Brochure](#)


Tuf-Flex® sanitary gasket is the only unitized gasket, and is setting new standards for purity, performance and flexibility. Tuf-Flex® is specifically designed to meet critical requirements in pharmaceutical, biotechnology, ultrapure water, WFI. Tuf-Flex® easily installs in between any ASME BPE or standard tri-clamp.



| Available Sizes | | | |
|-------------------|-------------|-------------|--------|
| Part # | Gasket O.D. | Gasket I.D. | Bead |
| A42MPGR-TF-050-E | 0.86" | 0.38" | NA |
| A42MPGR-TF-075-E | 0.86" | 0.62" | NA |
| A40MPGR-TF-100-E | 1.984" | 0.9" | 1.718" |
| A40MPGR-TF-150-E | 1.984" | 1.4" | 1.718" |
| A40MPGR-TF-200-E | 2.515" | 1.9" | 2.218" |
| A40MPGR-TF-250-E | 3.05" | 2.4" | 2.781" |
| A40MPGR-TF-300-E | 3.579" | 2.9" | 3.281" |
| A40MPGR-TF-400-E | 4.682" | 3.869" | 4.344" |
| A40MPGR-TF-600-E | 6.507" | 5.817" | 6.156" |
| A40MPGR-TF-800-E | 8.56" | 7.8" | 8.15" |
| A40MPGR-TF-1000-E | 10.55" | 9.74" | 10.12" |
| A40MPGR-TF-1200-E | 12.56" | 11.74" | 12.17" |

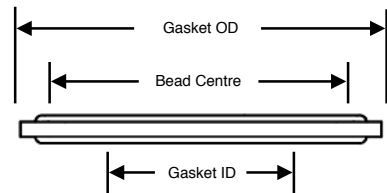

| Tuf-Flex Gasket® | |
|-------------------|-------------------------|
| Size | 1/2" to 12" |
| Temperature Range | -28°C to 204°C |
| Applications | High Purity Systems |
| Material | PTFE/EPDM |
| Pack Size | Individual or Multiples |
| Extras | Laser Engraving |



Certificate Available

FDA

ADI

USP VI