



PTFE is widely used in processing pipeline systems pharmaceutical and biotech industries. PTFE has an excellent temperature range combined with good chemical resistance properties. Each gasket has an EPDM or FKM filler and can be flanged depending on size. Each gasket easily installs in between any ASME BPE or standard tri-clamp.

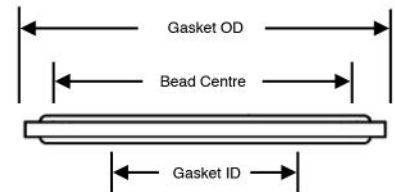

Available Sizes

| Part # | Gasket O.D. | Gasket I.D. | Bead |
|---------------|-------------|-------------|--------|
| 42MPGR-050-V | 0.86" | 0.38" | NA |
| 42MPGR-075-V | 0.86" | 0.62" | NA |
| 40MPGR-100-V | 1.984" | 0.9" | 1.718" |
| 40MPGR-150-V | 1.984" | 1.4" | 1.718" |
| 40MPGR-200-V | 2.515" | 1.9" | 2.218" |
| 40MPGR-250-V | 3.05" | 2.4" | 2.781" |
| 40MPGR-300-V | 3.579" | 2.9" | 3.281" |
| 40MPGE-400-V | 4.682" | 3.869" | 4.344" |
| 40MPGR-600-V | 6.507" | 5.817" | 6.156" |
| 40MPGR-800-V | 8.56" | 7.8" | 8.15" |
| 40MPGR-1000-V | 10.55" | 9.74" | 10.12" |
| 40MPGR-1200-V | 12.56" | 11.74" | 12.17" |



PTFE Envelope Gasket

| | |
|-------------------|---|
| Size | 1/2" to 12" |
| Temperature Range | - 73°C to 260°C |
| Applications | Chemical Resistance and High Temperatures |
| Material | PTFE with FKM Filler |
| Pack Size | Individual or Multiples |
| Extras | Laser Engraving |



Certificates Available

